
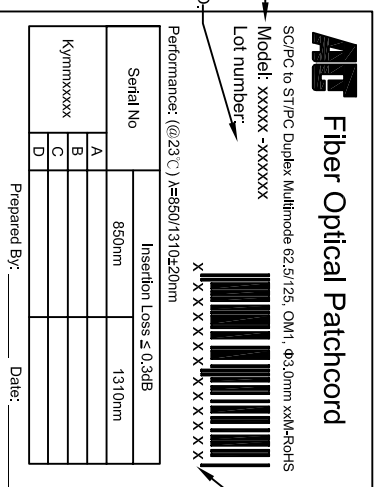



**NOTE:**

1. INSERTION LOSS < 0,3dB.
2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
3. DURABILITY: 500 CYCLES.
4. VIBRATION: 10 TO 55 Hz 1,5mm DOUBLE AMPLITUDE.
5. TENSILE STRENGTH: 10Kg.
6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"		
BAG TYPE	QTY	LABEL
SMALL	1 CABLE WITH TEST CARD	SEE "DETAIL C"
MEDIUM	5 CABLES	NONE
LARGE	POLYBAG	NONE

EACH LARGE POLYBAG IN AN OUTER CARTON

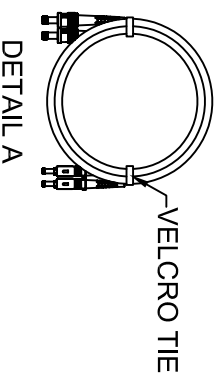


PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2
RL2015	15	15	49.2(15000)	412215-RL2015	8716065223620
RL2010	10	10	32.8(10000)	412210-RL2010	8716065223613
RL2005	05	5	16.4(5000)	412205-RL2005	8716065170818
RL2003	03	3	9.84(3000)	412203-RL2003	8716065170801
RL2002	02	2	6.56(2000)	412202-RL2002	8716065170795
RL2051	51	1.5	4.92(1500)	4122015-RL2051	8716065223606
RL2001	01	1	3.28(1000)	412201-RL2001	8716065170788

## DETAIL B

y: Year; mm: Month  
xxxxx: Serial Number

ITEM	QTY	PART NO.	DESCRIPTION
5	2PCS		SC DUST COVER, CLEAR.
4	2SETS		CONNECTOR: SC/PC MM, BLACK HOUSING WITH BLACK & RED BOOT.
3	2PCS		ST DUST COVER, CLEAR.
2	2SETS		CONNECTOR: ST/PC MM, WITH BLACK & RED BOOT.
1	1PC		CABLE: MULTIMODE, 62.5/125um, 3.0mm ZIPCORD, OFNR, ORANGE JACKET.

PART LIST

		UNIT:	TITLE:	
		Inches[mm]	PATCHCORD SC-ST MULTIMODE DUPLEX 62.5/125, OM1, 3.0mm, ORANGE.	
DRAWN BY	Catherine	DATE	CUSTOMER	
CHECKED BY		2007/10/4	CUSTOMER PART NO.	
APPROVED BY		DATE	RL20**	
SALE BY		DATE	DRAWING NO.	REV.
			PK709003	A
			TREND PART NO.	